




LZ-4/M



R

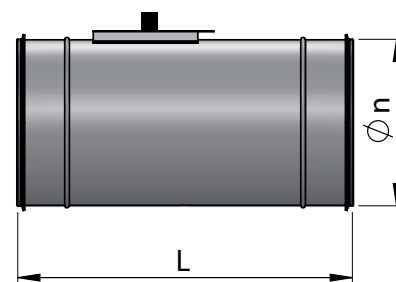

**Characteristics**

Circular Shut-off damper leakage certified class 4 according to EN 1751.

**Material**

Galvanized steel frame.  
Galvanized steel blade with airtight gasket.


**Fixing**

Coupling with gasket


**Model**

LZ-4/R Circular Shut-off damper with manual control.  
LZ-4/M: Circular Shut-off damper with pin for servo-motor.


## Air sealing blade

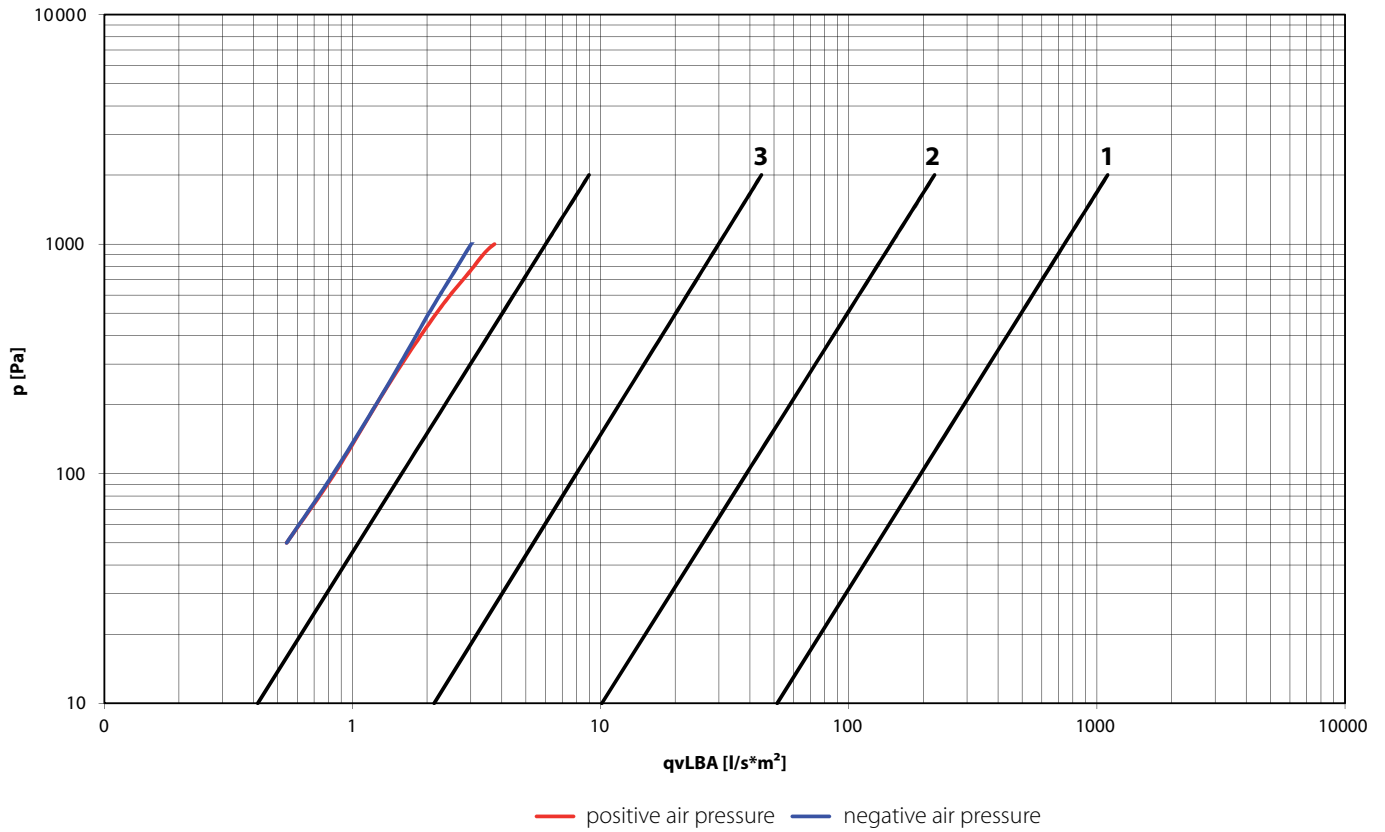

## Air sealing frame

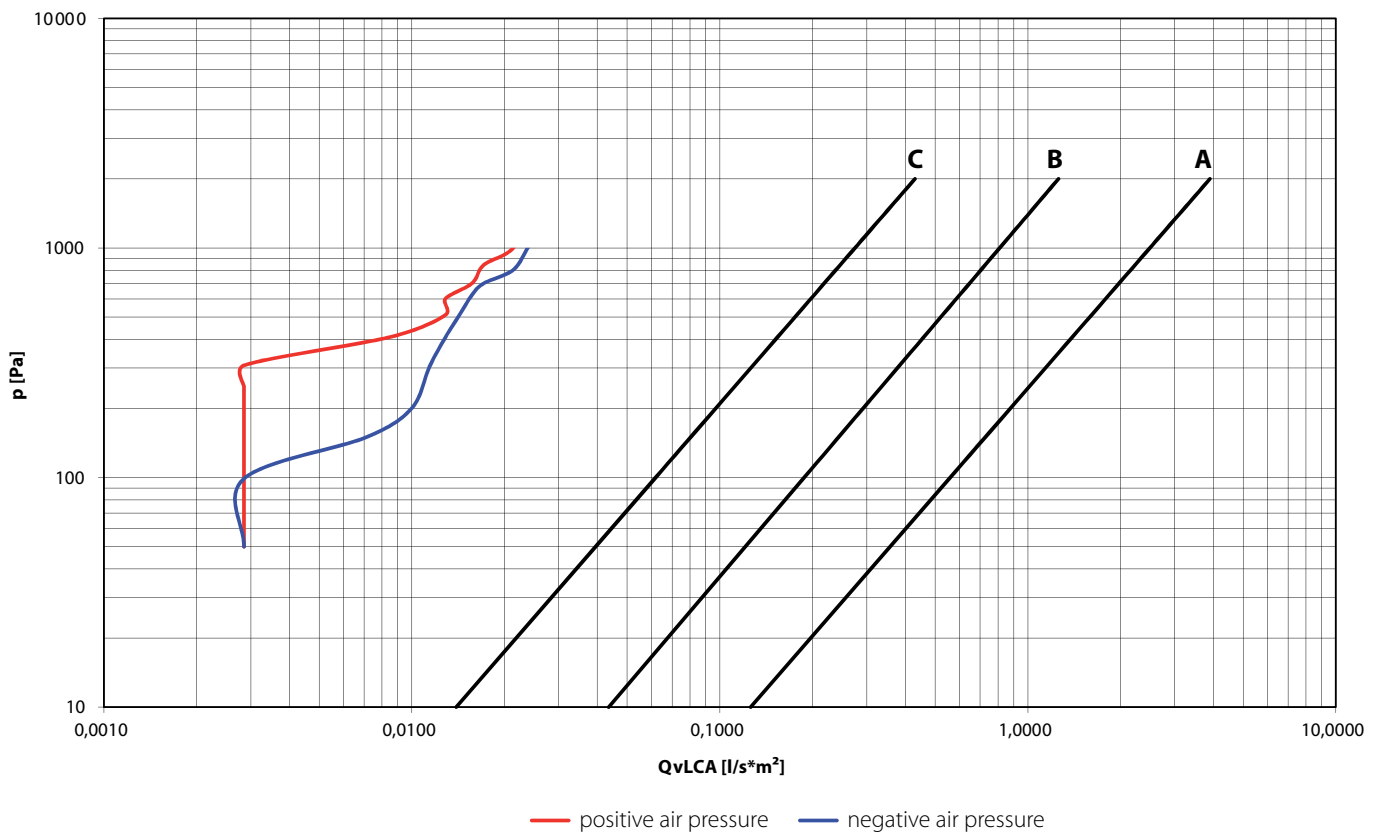

## Quick Selection Diagram

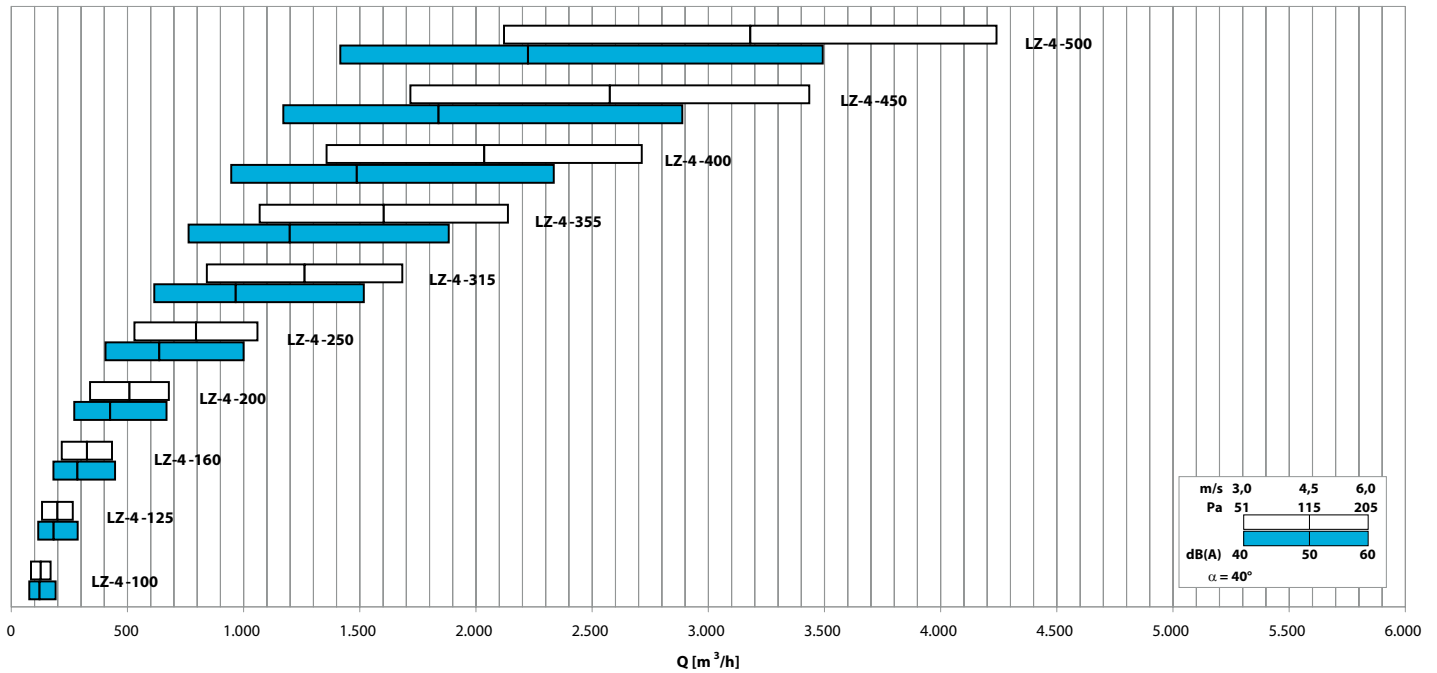

## Selection table

Model	A <sub>1</sub> [m <sup>2</sup> ]	Q [m <sup>3</sup> /h]		Q [m <sup>3</sup> /h]		D <sub>p</sub> (α=40°) [Pa]		L <sub>WA</sub> (α=40°) [dB(A)]	
		min	max	min	max	min	max	min	max
LZ-4-100	0,0079	3	6	80	170	51	205	42	58
LZ-4-125	0,0123	3	6	130	270	51	205	43	58
LZ-4-160	0,0201	3	6	220	430	51	205	44	58
LZ-4-200	0,0314	3	6	340	680	51	205	45	61
LZ-4-250	0,0491	3	6	530	1060	51	205	46	61
LZ-4-315	0,0779	3	6	840	1680	51	205	47	61
LZ-4-355	0,0990	3	6	1070	2140	51	205	47	61
LZ-4-400	0,1257	3	6	1360	2710	51	205	48	62
LZ-4-450	0,1590	3	6	1720	3440	51	205	48	62
LZ-4-500	0,1963	3	6	2120	4240	51	205	49	62
LZ-4-630	0,3117	3	6	3370	6730	51	205	50	63

## Order key

### LZ-4 / 200 / R

