



Characteristics

Circular diffusers with adjustable cones on panel for air intake and delivery.
Installation height: 2,7-3,5 m.

Material


External cone in aluminium, central cone and damper (included in the price) in plastic RAL 9010 painted.

Fixing


Fixing by concealed fixing screws mounted on the diffuser neck.

Accessories


Galvanized steel connecting plenum.
Equalizer (EQ).

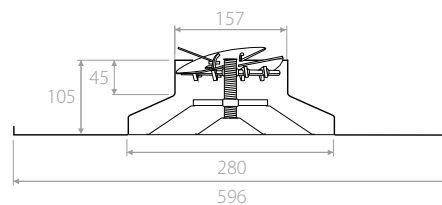

Glass wall

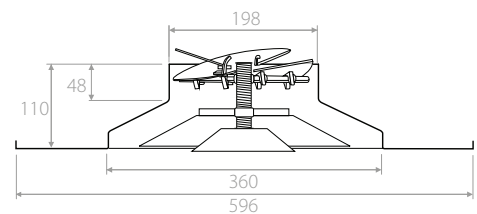


Detail of the diffuser attachment to the duct


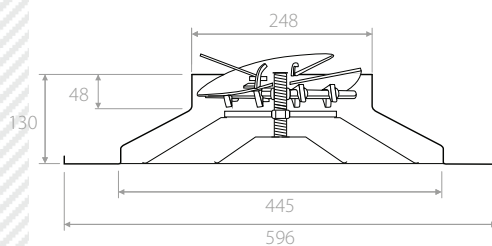


Air supply duct

GPRW

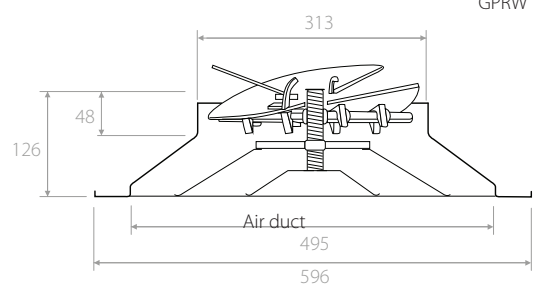

GPRW

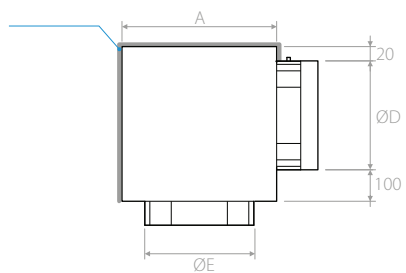

	AxB	ØD	ØE
PDC 160	250x250	156	162
PDC 200	300x300	196	202
PDC 250	350x350	196	252
PDC 315	400x400	246	317