


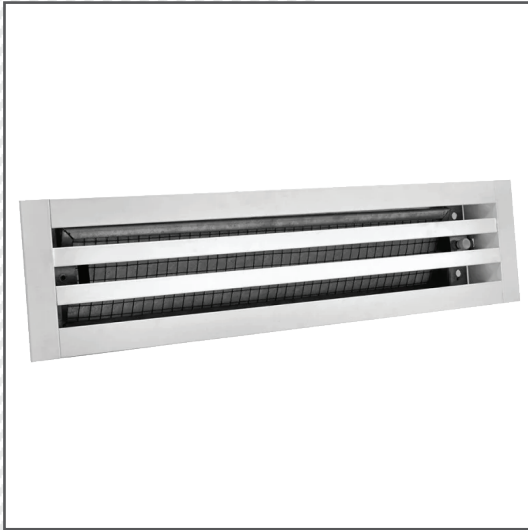

## Characteristics

Linear slot diffusers with the filter.  
For ceiling installation and for air intake and delivery.  
Installation height: 2,5-3,1 m.

## Material

Anodized extruded aluminium.




## Fixing

By inner mounting mobile bracket.

## Accessories

Galvanized steel connecting plenum with insulation.


## Drawings

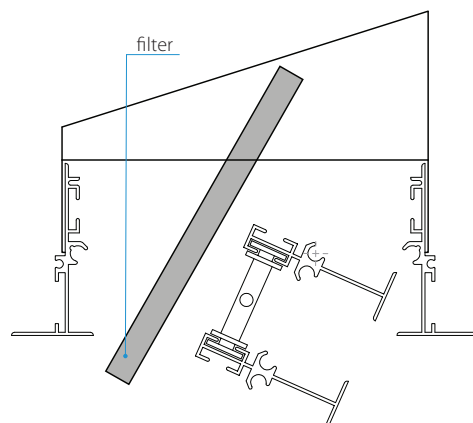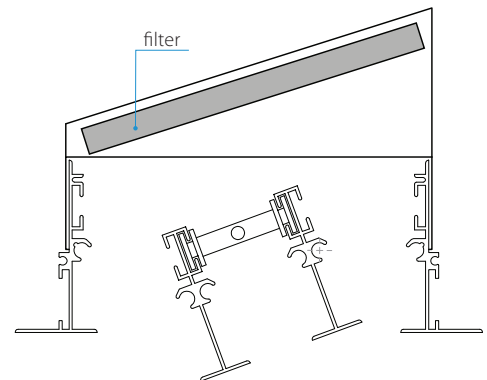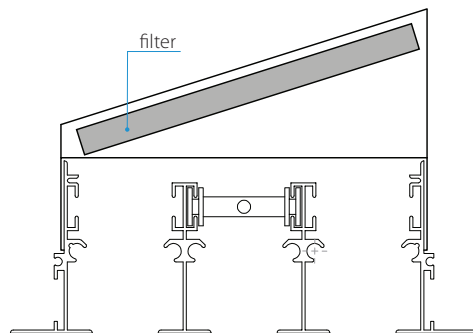


## Dimensions

| N. slots | Dolžina [mm] | Ø spigot<br>No. spitos | A mm | B mm | C mm | S mm | Z mm | Mounting<br>brackets |
|----------|--------------|------------------------|------|------|------|------|------|----------------------|
| 3        | 800          | 198-1                  | 117  | 128  | 155  | 132  | 144  | 2                    |
|          | 1000         | 198-2                  |      |      |      |      |      | 2                    |
|          | 1500         | 198-3                  |      |      |      |      |      | 2                    |
|          | 2000         | 198-4                  |      |      |      |      |      | 4                    |
| 4        | 800          | 198-2                  | 155  | 165  | 191  | 169  | 181  | 2                    |
|          | 1000         | 198-2                  |      |      |      |      |      | 2                    |
|          | 1500         | 198-3                  |      |      |      |      |      | 2                    |
|          | 2000         | 198-4                  |      |      |      |      |      | 4                    |
| 5        | 800          | 248-1                  | 192  | 202  | 229  | 206  | 218  | 4                    |
|          | 1000         | 248-1                  |      |      |      |      |      | 4                    |
|          | 1500         | 248-2                  |      |      |      |      |      | 4                    |
|          | 2000         | 248-2                  |      |      |      |      |      | 4                    |

## Drawings

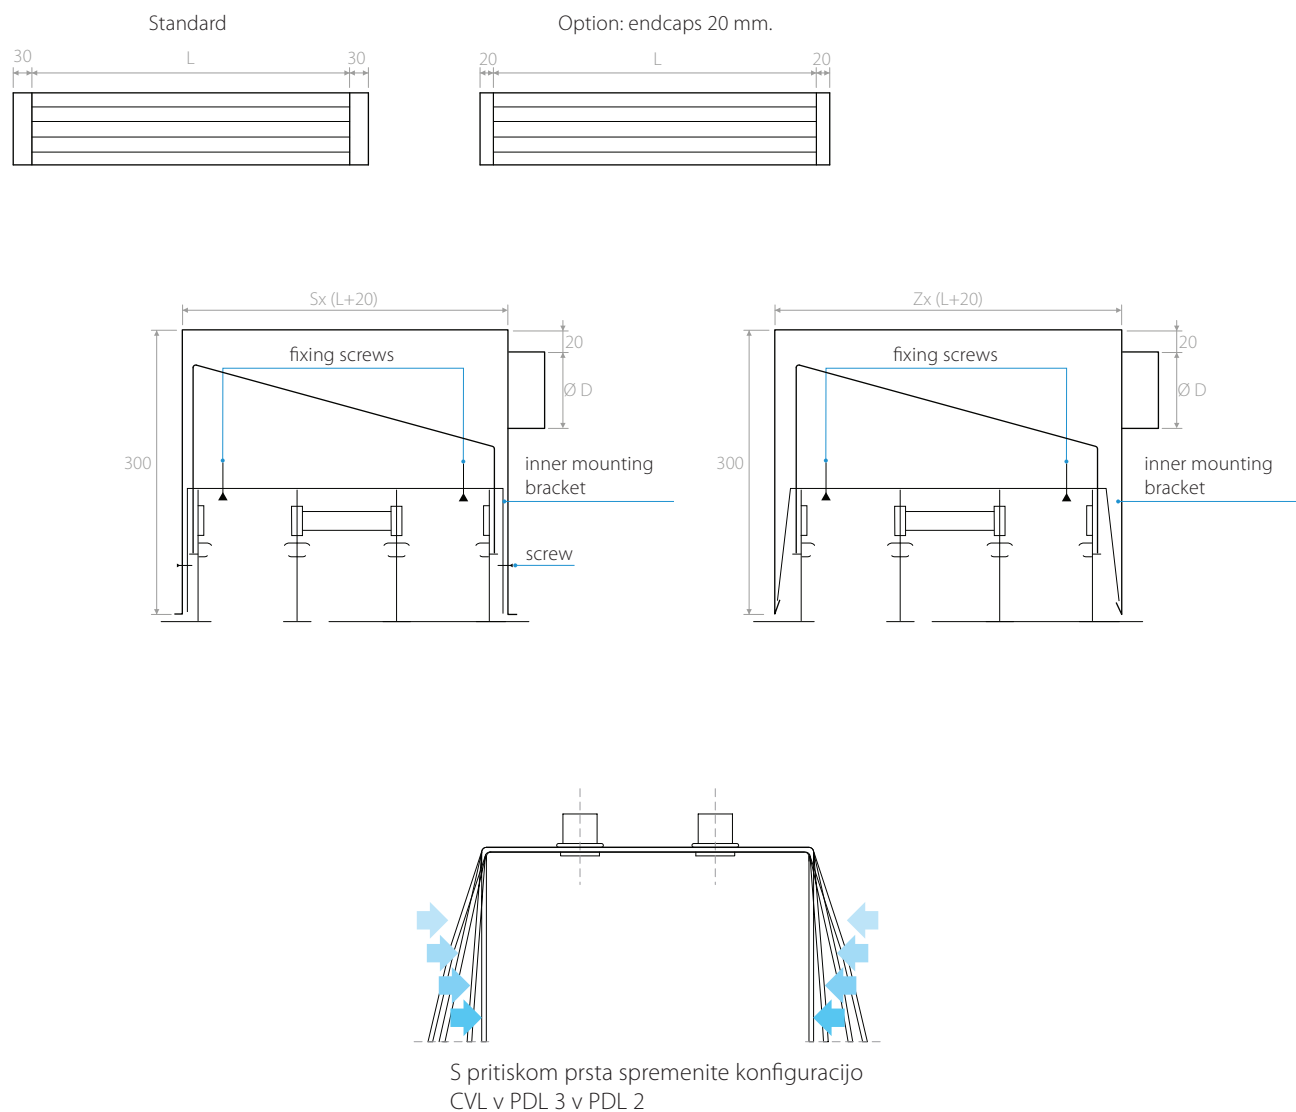

Quick selection diagram

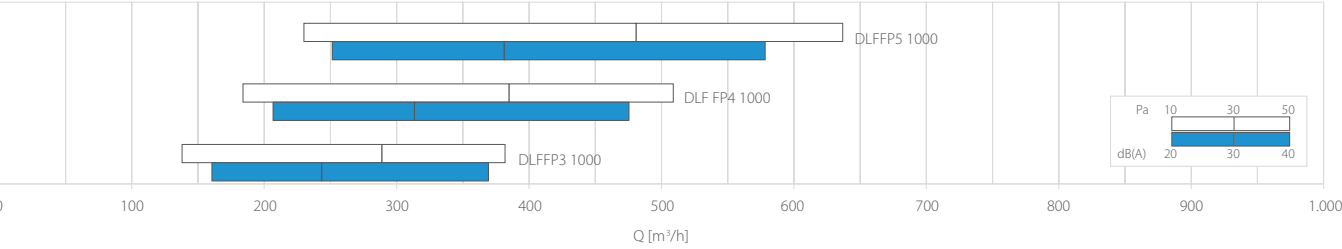

Selection table

| Model       | A <sub>k</sub> [m²] | Q [m³/h] |     | L <sub>WA</sub> [dB(A)] |     | Dp <sub>t</sub> [Pa] |     |
|-------------|---------------------|----------|-----|-------------------------|-----|----------------------|-----|
|             |                     | min      | max | min                     | max | min                  | max |
| DLFFP3 1000 | 0,02149             | 140      | 380 | 17                      | 41  | 10                   | 50  |
| DLFFP4 1000 | 0,02868             | 180      | 510 | 17                      | 42  | 10                   | 50  |
| DLFFP5 1000 | 0,03588             | 230      | 640 | 18                      | 42  | 10                   | 50  |

Accessories

|                                    |  |
|------------------------------------|--|
| CVLT<br>1-4 slots                  |  |
| CVLT<br>5-8 slots                  |  |
| CG<br>Hook                         |  |
| CM<br>Kit continuity<br>(2 pieces) |  |