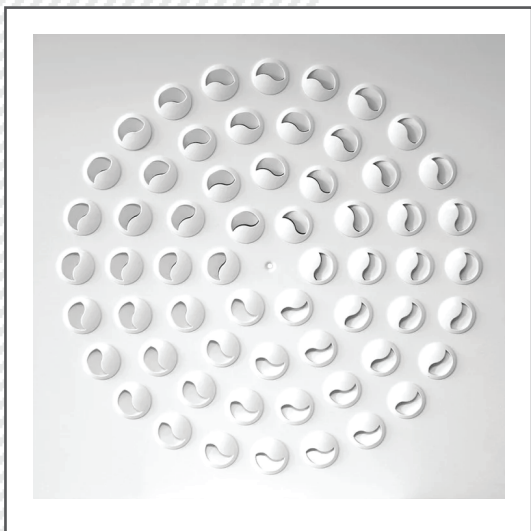


**Characteristics**

Diffusers with adjustable nozzles on panel.
For ceiling installation and for air delivery.
Installation height: 2,6-4,1 m.

Material


RAL 9010 white painted steel,
nozzles are made of ABS RAL 9010 white.

Fixing

Fixing by using lateral screws or central screw on mounting
bridge.


Accessories

Galvanized steel plenum, standard or insulated, with or without
equalizer sheet, calibration damper and mounting bridge.

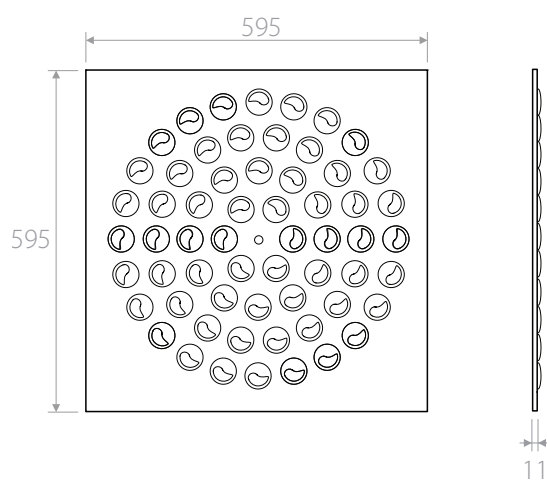
Drawings

Drawings


PQZ1




PQZ2



PQZI1




PQZI2



Plenum externally insulated thickness 6 mm

Assembly detail

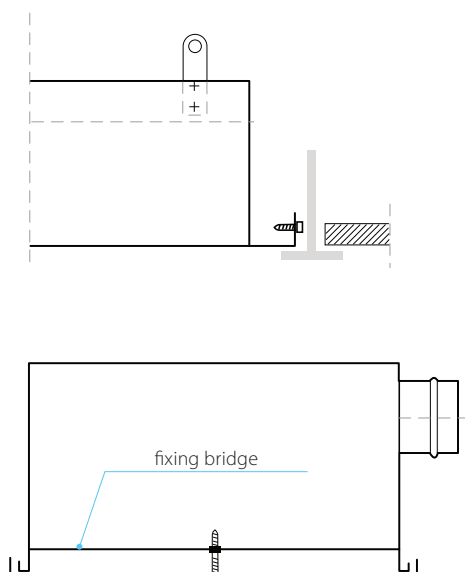

Selection table

Model	A_k [m ²]	Q [m ³ /h]		L_{WA} [dB(A)]		$X_{(0,20)}$ [m]		Dp_t [Pa]	
		min	max	min	max	min	max	min	max
DMTN 600x60	0,0155	170	390	20	36	1,7	4,8	10	50