



Characteristics

Circular diffusers with adjustable cones on panel.
For ceiling installation and for air intake and delivery.
Installation height: 2,7-3,5 m.

Material

White RAL 9010 painted steel.

Fixing


Mounting with panel on modular ceiling.

Accessories

Galvanized steel connecting plenum.
Butterfly damper (SF) with central screw adjustment
through the centre of the diffuser.
Equalizer (EQ).

Dimensions


Model	ØA	B	C	D
100	96	596x596	85	33
150	146	596x596	90	23
160	156	596x596	90	28
200	196	596x596	115	37
250	246	596x596	135	37
300	296	596x596	115	45
315	311	596x596	115	44

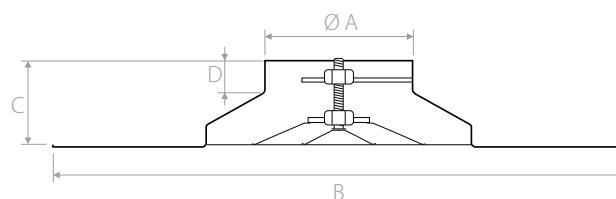

Plenum dimensions

KO-H / KO-H-I	AxB	ØD	ØE
100	200x200	96	102
150	250x250	146	152
160	250x250	156	162
200	300x300	196	202
250	350x350	196	252
300	400x400	246	302
315	400x400	246	317

KO-H

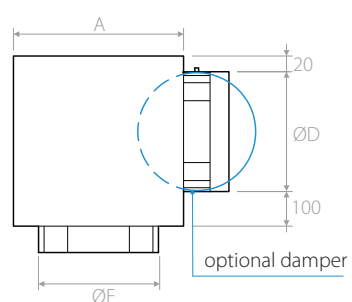

KO-H-I

