
DSK





Application Round duct outlets are used for the injection of air into rooms such as conference halls, sports halls, industrial buildings, etc. It can be installed anywhere in the duct system and is suitable for supplying both cold and warm air. The function with the mounting kit RS (Sliding damper) is the regulation of the amount of air.

Description The round tube outlets are made of galvanized tubes with a round frontal section. In the round tube outlets are long side slots in which the plastic elements are used. Round tubing DSK can also be made from stainless steel.

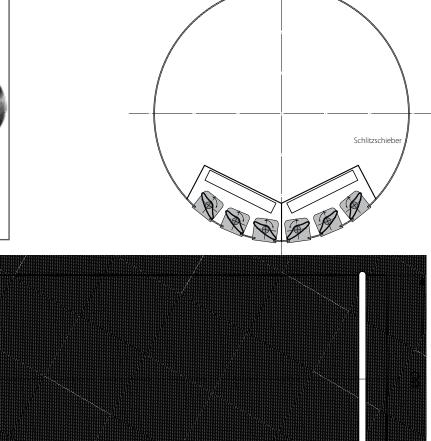


ØD	Nr. of slots								
	2	4	6	8	10	12	14		
150	\checkmark	✓							
160	\checkmark	\checkmark							
180	\checkmark	✓							
225	\checkmark	\checkmark							
250	\checkmark	✓							
280	✓	✓	✓						
300	\checkmark	\checkmark	\checkmark						
315	\checkmark	✓	\checkmark						
355	\checkmark	✓	\checkmark	\checkmark					
400	\checkmark	\checkmark	\checkmark	\checkmark					
450	\checkmark	✓	\checkmark	✓					
500	\checkmark								
560	\checkmark	✓	✓	✓	✓	\checkmark	✓		
600	\checkmark	✓	\checkmark	✓	\checkmark	\checkmark	✓		
630	✓	✓	✓	✓	✓	\checkmark	✓		
710	✓	✓	\checkmark	✓	\checkmark	\checkmark	✓		
800	✓	✓	✓	✓	✓	\checkmark	✓		
900	✓	✓	✓	✓	✓	\checkmark	✓		


Quick selection for the single round pipe outlet

Recommended air volume m ³ /h												
L (mm)	Nr. of slots	Lwa (dB(a))	Ø D 150,160	Ø D 200, 250	Ø D 315, 355	Ø D 400, 450	Ø D 500, 560	Ø D 630, 710, 800, 900				
	2	26	134	134	134	134	134	134				
	4	30	268	268	268	268	268	268				
1000	6	34	/	/	395	395	395	395				
	8	35	/	/	/	530	530	530				
	10	36	/	/	/	665	665	665				
	12	37	/	/	/	/	780	780				
	14	38	/	/	/	/	920	920				

Circular tube outlets with a length of 1000 mm are manufactured in two parts and connected with a connecting element.

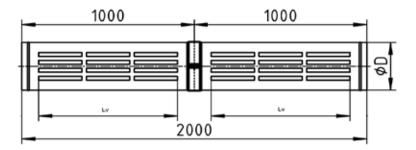


Insufflation type

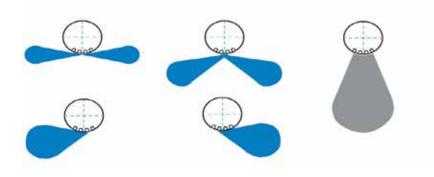





DSK

Quick selection

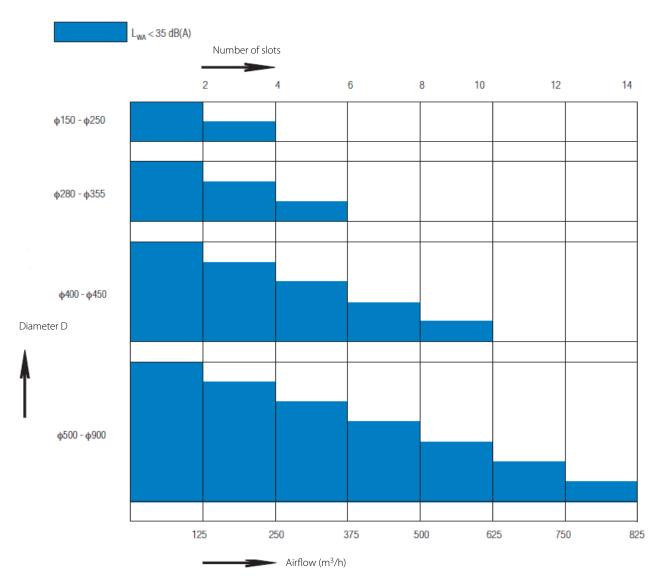

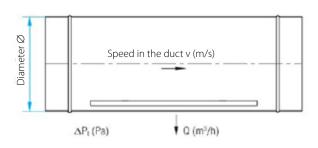



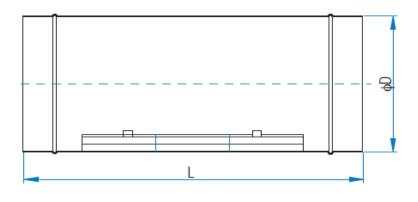

Order codes for the duct diffuser DSK:

