


## PREZZI - PRICES

BxH	MRT
mm	€
<b>595x595</b>	


N.B.: Prezzi con filtro incluso - N.B.: Prices with filter included

## DISEGNI - DRAWINGS

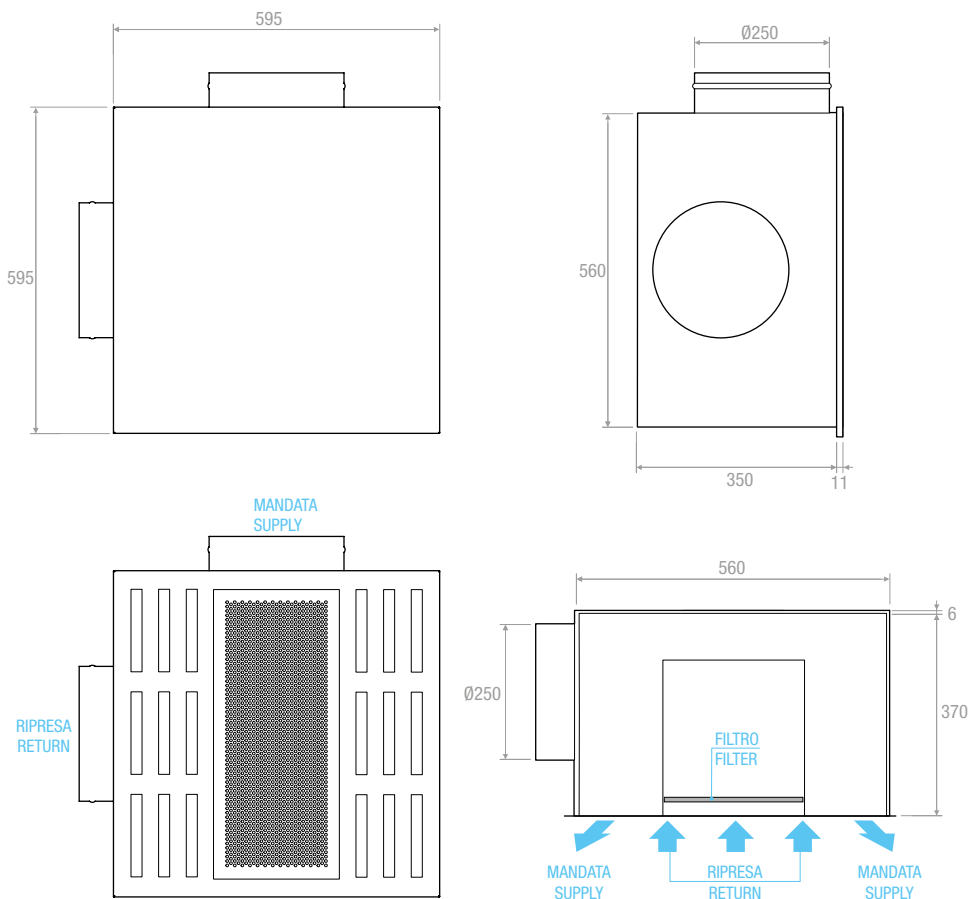

## TABELLA DI SELEZIONE - SELECTION TABLE

Modello - Model	A <sub>x</sub> [m <sup>2</sup> ]	P [m <sup>3</sup> /h]		L <sub>wa</sub> [dB(A)]		X <sub>(0,20)</sub> [m]		Dp <sub>t</sub> [Pa]	
		min	max	min	max	min	max	min	max
<b>MRT</b>	0,0219	190	420	24	34	2	3,9	10	50

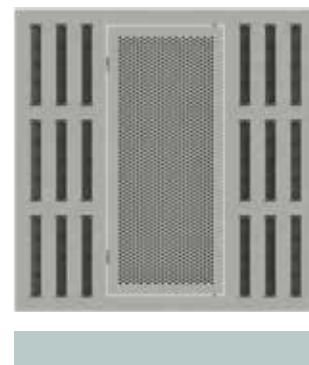**CARATTERISTICHE:**

Diffusori di mandata e ripresa con getti regolabili e plenum multifunzione.

**COSTRUZIONE:**

Diffusore in acciaio verniciato bianco RAL 9010 con deflettori in polipropilene nero RAL 9005.

Plenum in acciaio zincato a doppio flusso con isolamento anticondensa.

**IMPIEGO:**

A soffitto di mandata e ripresa (contemporanea).

Altezza di installazione 2,5-4,1 m.

**FISSAGGIO:**

Fissaggio a controsoffitto.

**CHARACTERISTICS:**

Supply and retur diffuser with adjustable throws and multifunction plenum.

**CONSTRUCTION:**

RAL 9010 white painted steel diffuser with deflection blades made of polypropylene RAL 9005 black. Double flow plenum made in insulated galvanized steel.

**UTILIZATION:**

For modular false-ceiling installation for contemporary air supply and return.

Installation height 2,5-4,1 m.

**FIXING:**

Fixing on false-ceiling.

