

Characteristics


Supply and return diffuser with adjustable throws and multifunction plenum. For modular false-ceiling installation for contemporary air supply and return. Installation height 2,5-4,1 m.

Material

RAL 9010 white painted steel diffuser with deflection blades made of polypropylene RAL 9005 black. Double flow plenum made in insulated galvanized steel.

Fixing

Fixing on false-ceiling.

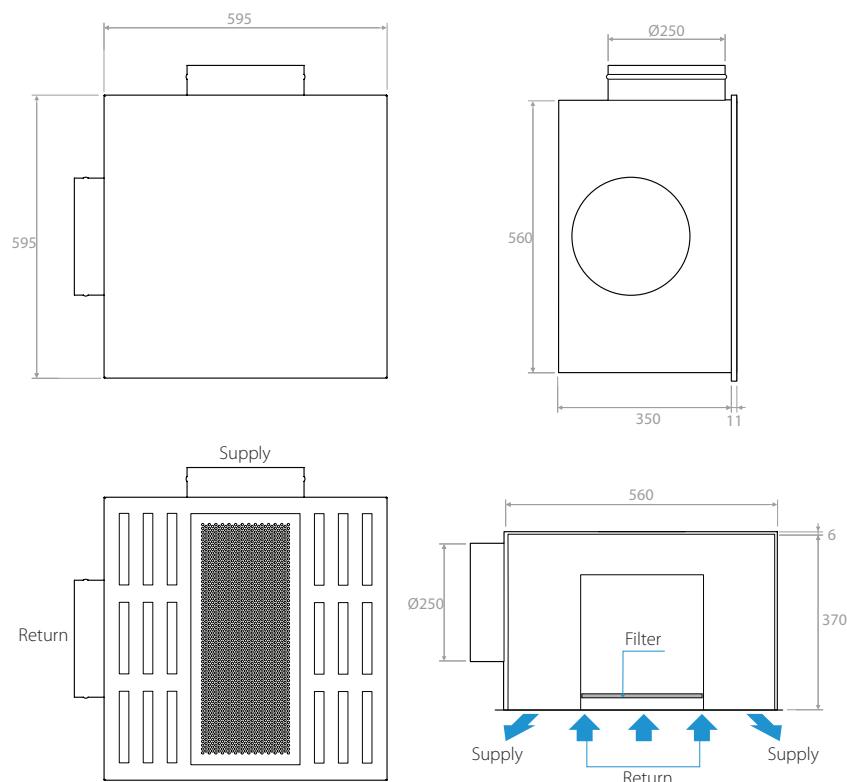

Izbirna tabela

Model	A _k [m ²]	P [m ³ /h]		L _{WA} [dB(A)]		X _(0,20) [m]		D _{p,t} [Pa]	
		min.	maks.	min.	maks.	min.	maks.	min.	maks.
MRT	0,0219	190	420	24	34	2	3,9	10	50