



Characteristics

Jet diffusers for long throw with orientable nozzle for a maximum angle of 30°. For ceiling or wall installation and for air delivery. Installation height: 2,4-11,5 m.

Material

Naturale satinized aluminium with transparent primer.


Fixing

Fixing by frontal screws mounted on the diffuser ring to the duct or to the connector on circular duct.


Accessories

Connector for circular duct.
CV: cover screws.






UDD 80

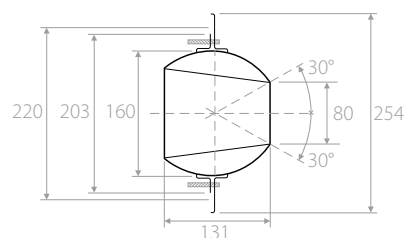


UDD 150

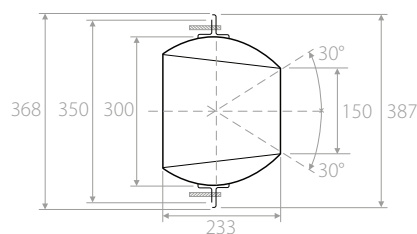

UDD 200

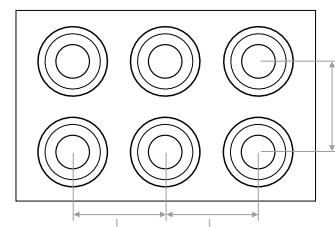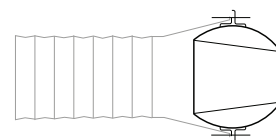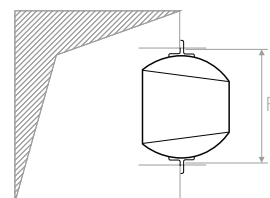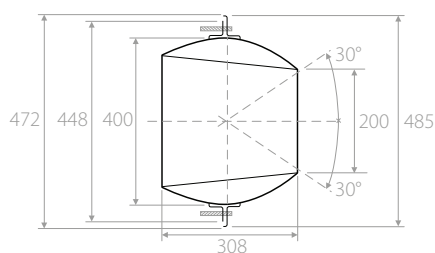

Quick selection diagram

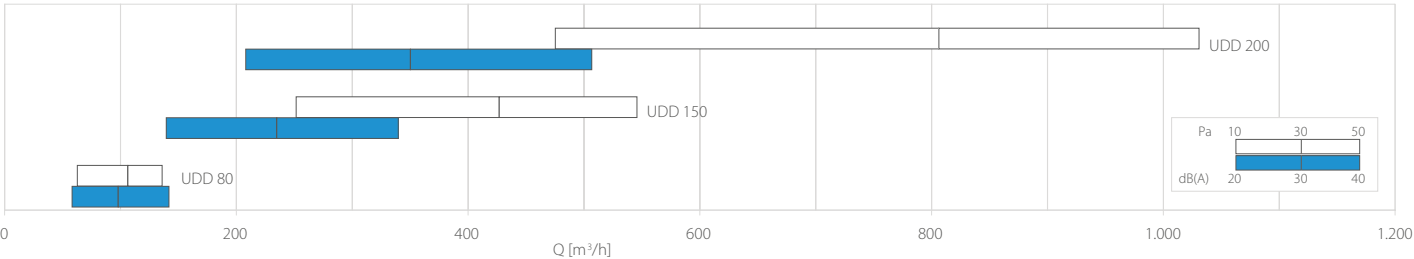

Selection table

Model	A _k [m²]	Q [m³/h]		L _{WA} [dB(A)]		X _(0,25) - Y _(0,25) [m]		Dp _t [Pa]	
		min	max	min	max	min	max	min	max
UDD 80	0,0050	60	140	20	40	8,1	18,9	10	50
UDD 150	0,0176	250	550	31	58	11,9	26,2	10	50
UDD 200	0,0314	480	1030	38	69	14,0	30,1	10	50