



Characteristics



Supply and exhaust valves.
For ceiling installation. Installation height: 2,5-3,0 m

Material

RAL 9016 white polypropylene.

Fixing

With fixing ring.

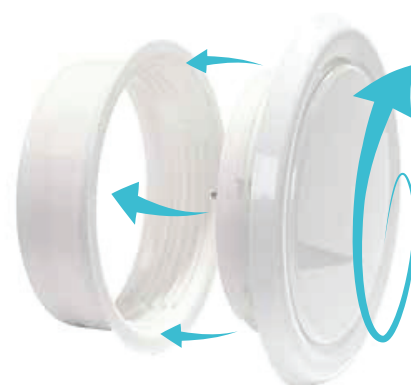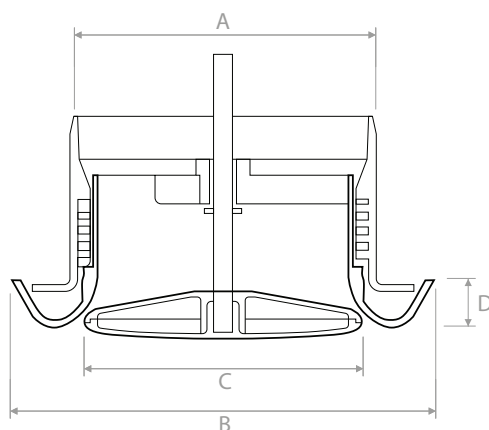

Dimensions [mm]				
Model	A	B	C	D
VIP 100	97	138	90	15
VIP 125	122	138	115	15
VIP 160	157	215	130	15
VIP 200	195	255	189	15

Selection table

Model	A_k [m²]	Q [m³/h]		L_{WA} [dB(A)]		Dp_t [Pa]	
		min.	max.	min.	max.	min.	max.
VIP 100	0,00785	20	50	-	21	10	50
VIP 125	0,01276	40	90	-	23	10	50
VIP 160	0,01767	60	130	-	24	10	50
VIP 200	0,03142	100	230	-	26	10	50