



Opis

VPE: Odvodni ventili.
VPD: Dovodni ventil.
Vgradnja v strop za dovod zraka oziroma za odvod zraka


Material

Jeklena pločevina.


Pritrditev

Z vijakom na pločevinasti pritrdilni obroč.

VPE

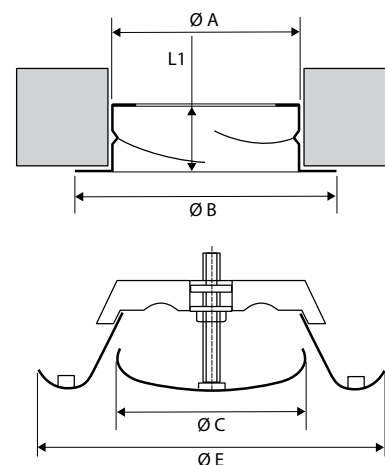

VPD

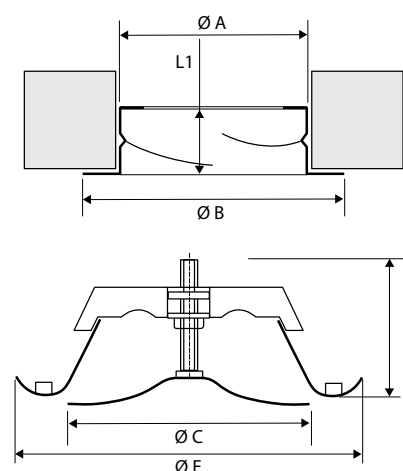

Dimenzije VPE

Dn	Ø A	Ø B	Ø C	Ø E	L	L1
100	99	150	95	170	55	50
125	124	175	115	200	65	60
150	149	225	135	230	65	60
200	199	265	155	260	65	60

Dimenzije VPE

Dn	Ø A	Ø B	Ø C	Ø E	L	L1
100	99	150	115	165	55	50
125	124	175	135	195	65	60
150	149	225	155	225	60	60
200	199	265	175	255	60	60

Ključ za naročanje

VPE / 100 / 0

Pritrdilni obroč

Velikost

VPE - Odvodni ventil.
VPD - Dovodni ventil.

Izbirna tabela

VPE

Nazivna (n) [mm]						Tok zraka [M ³ /N]								
Odpiranje [mm]	80	100	125	160	200	Q _v [M ³ /N]	20	40	60	80	100	150	200	300
	-9					ΔP _t [Pa]	90							
						NR	-							
	-6	-9				ΔP _t [Pa]	45	170						
						NR	-	20						
	-3	-6	-12			ΔP _t [Pa]	20	80	200	300				
						NR	-	12	25	28				
	0	-3			-20	ΔP _t [Pa]	10	50	120	200				
						NR	-	-	17	26				
	6		-6			ΔP _t [Pa]		30	70	120	200			
						NR		-	12	20	28			
	9	6				ΔP _t [Pa]		20	40	80	130			
						NR		-	-	15	22			
			0			ΔP _t [Pa]		15	30	60	80	200		
						NR		-	-	11	18	30		
		12	6			ΔP _t [Pa]		10	20	40	60	150		
						NR		-	-	-	13	27		
				0		ΔP _t [Pa]			15	25	40	90	170	
						NR			-	-	9	21	30	
			12	6		ΔP _t [Pa]				15	25	60	100	220
						NR				-	-	15	25	31
				12		ΔP _t [Pa]					15	30	60	150
						NR					-	10	18	30

VPD

Nazivna (n) [mm]						Tok zraka [M ³ /N]								
Odpiranje [mm]	80	100	125	160	200	Q _v [M ³ /N]	20	40	60	80	100	150	200	300
	3					ΔP _t [Pa]	90	200						
						L _t	0,80	1,20						
						NR	30	40						
		0				ΔP _t [Pa]	50	120	200					
						L _t	0,70	1,05	1,40					
						NR	23	35	42					
	6		-3	-6	-6	ΔP _t [Pa]	30	75	130	200				
						L _t	0,60	0,90	1,30	1,60				
						NR	17	30	37	43				
		3				ΔP _t [Pa]	20	45	80	130				
						L _t	0,60	0,85	1,20	1,40				
						NR	-	25	32	38				
			0	-3	-3	ΔP _t [Pa]	13	30	60	85	200			
						L _t	0,50	0,85	1,00	1,20	1,90			
						NR	-	20	28	33	45			
		12	6			ΔP _t [Pa]	8	22	40	60	150			
						L _t	0,45	0,75	0,95	1,20	1,80			
						NR	-	15	24	30	42			
				0	0	ΔP _t [Pa]		15	30	45	100	200		
						L _t		0,70	0,90	1,10	1,60	2,20		
						NR		-	20	27	39	46		
		12				ΔP _t [Pa]		12	22	35	80	42		
						L _t		0,70	0,90	1,10	1,60	2,20		
						NR		-	18	23	35	43		
			6	6		ΔP _t [Pa]			15	25	60	100		
						L _t			0,70	0,95	1,40	1,90		
						NR			-	20	31	38		
			12		6	ΔP _t [Pa]				13	35	60	130	
						L _t				0,80	1,20	1,70	2,50	
						NR				-	23	32	43	
				12	12	ΔP _t [Pa]				5	20	35	80	150
						L _t				0,75	1,15	1,50	2,20	3,00
						NR				-	17	25	35	48
					15	ΔP _t [Pa]					12	22	45	90
						L _t					0,90	1,30	1,90	2,70
						NR					-	21	32	49
					20	ΔP _t [Pa]						13	29	45
						L _t						1,15	1,70	2,20
						NR						15	25	33