


# GMAI60SMF

GRI



GMAI



## PREZZI - PRICES

STOCK

	CON FILTRO WITH FILTER							
BxH	GMAI60SMF	GMAI60SM	FILTRO - FILTER	SC	PDZ1	PDZ11	PDZ2	PDZ1 2
mm	€	€	€	€	€	€	€	€
<b>595x595</b>								

## VERNICIATURA - PAINTING:

FINITURA ALLUMINIO NON DISPONIBILE. Disponibile solo verniciato. Dal listino sopra indicato applicare gli aumenti RAL.  
ALUMINIUM FINISHING UNAVAILABLE. Available only the painted version. Apply the ral increase from gross prices.

Colori RAL 9010 - 9016: + 15% - Color RAL 9010 - 9016: + 15%  
Altri colori: prezzi a richiesta - Different colors: prices on request

## DESCRIZIONI - DESCRIPTIONS:

**GMAI60SMF:** Griglia a maglia quadra 13x13 mm, inclinata di 45°, smontabile, dimensione 595x595 mm esterno cornice, con filtro incluso - Egg crate grille 13x13 mm pitch inclined 45° with removable core, 595x595 overall size, with filter

**GMAI60SM:** Griglia a maglia quadra 13x13 mm, inclinata di 45°, smontabile, dimensione 595x595 mm esterno cornice, senza filtro - Egg crate grille 13x13 mm pitch inclined 45° with removable core, 595x595 overall size, without filter

## CARATTERISTICHE:

Griglie a maglia quadra 13x13 mm, inclinata di 45° smontabile per controsoffitto dim. 595x595 esterno cornice.

## COSTRUZIONE:

Alluminio.

## IMPIEGO:

A controsoffitto, in ripresa.

## FISSAGGIO:

Fissaggio con clips o su richiesta con viti frontali.

## ACCESSORI:

- Plenum in acciaio zincato standard e isolato.
- Serranda di taratura in acciaio zincato con alette a movimento contrapposto.

## CHARACTERISTICS:

Egg crate grilles 13x13 mm pitch, inclined of 45° with removable core, for false ceilings 595x595 overall size.

## CONSTRUCTION:

Aluminium.

## UTILIZATION:

For false ceilings installation and for air intake.



## FIXING:

Fixing by using clips or frontal screws on demand.

## ACCESSORIES:


- Galvanized steel plenum, standard or insulated.
- Calibration damper made of galvanized steel and fins with opposite movement.

## DISEGNI - DRAWINGS

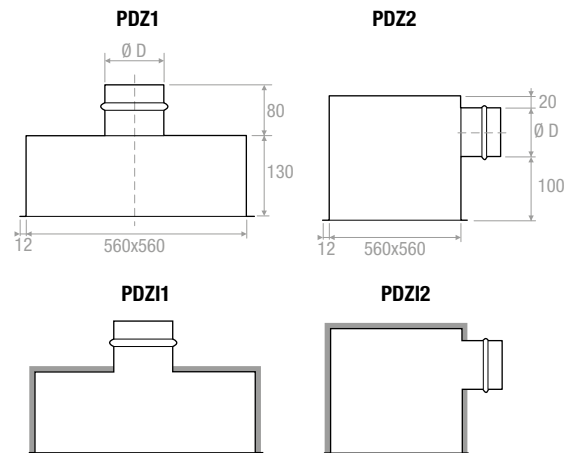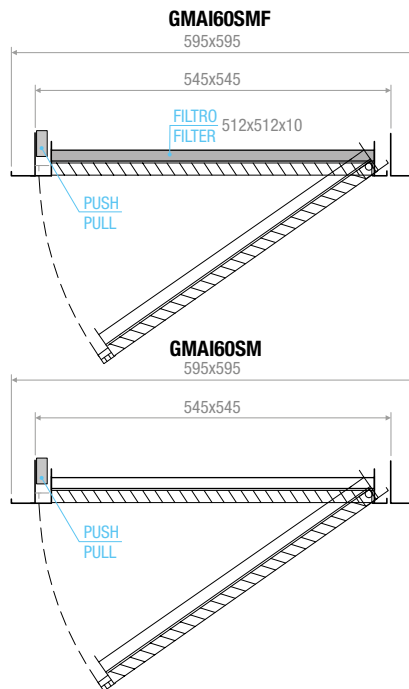

Plenum isolato esternamente spessore 6 mm  
Plenum externally insulated thickness 6 mm

## DIAGRAMMA SCELTA RAPIDA - QUICK SELECTION DIAGRAM

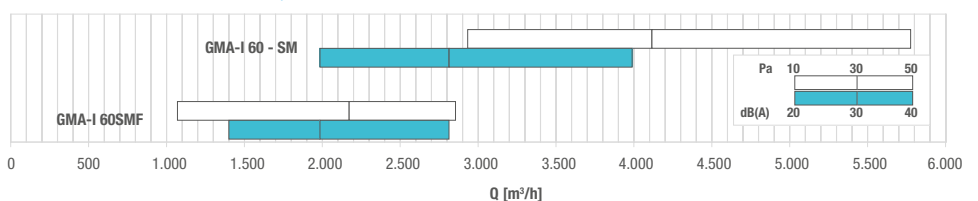

## TABELLA DI SELEZIONE - SELECTION TABLE

Modello - Model	A <sub>k</sub> [m²]	Q [m³/h]		L <sub>WA</sub> [dB(A)]		Dp <sub>t</sub> [Pa]	
		min	max	min	max	min	max
GMAI60SM	0,2375	2640	5210	41	60	5	20
GMAI60SMF	0,2375	1070	2860	-	43	10	50

