



## Characteristics

Grilles with fixed blades with 0° or 15° deflection and anticondensing thermal insulation.  
For wall and fan-coils installation, and for cold air delivery with high temperature gradient.  
Installation height: 2,5-3,1 m.

## Material


Anodized aluminium.

## Fixing


Fixing by using clips or frontal screws (on request).

## Accessories

Calibration damper made of galvanized steel and fins with opposite movement.  
Mounting counterframes made of galvanized steel sheet.

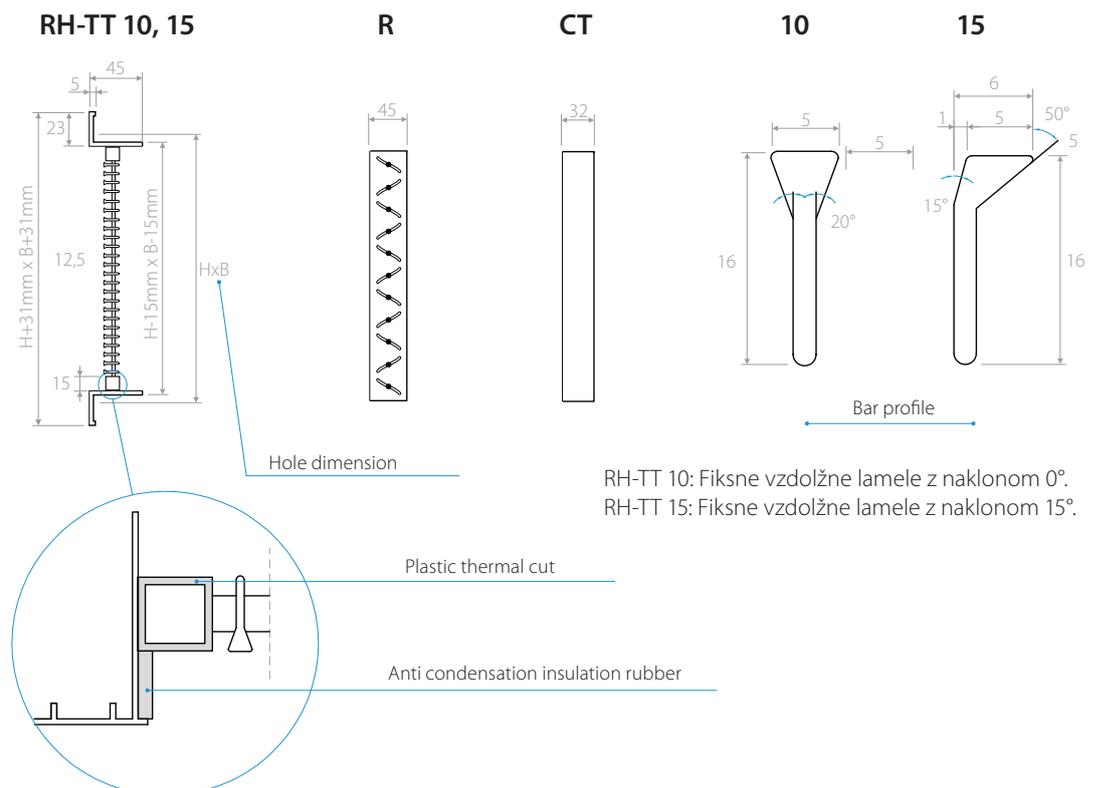

# Quick selection diagram

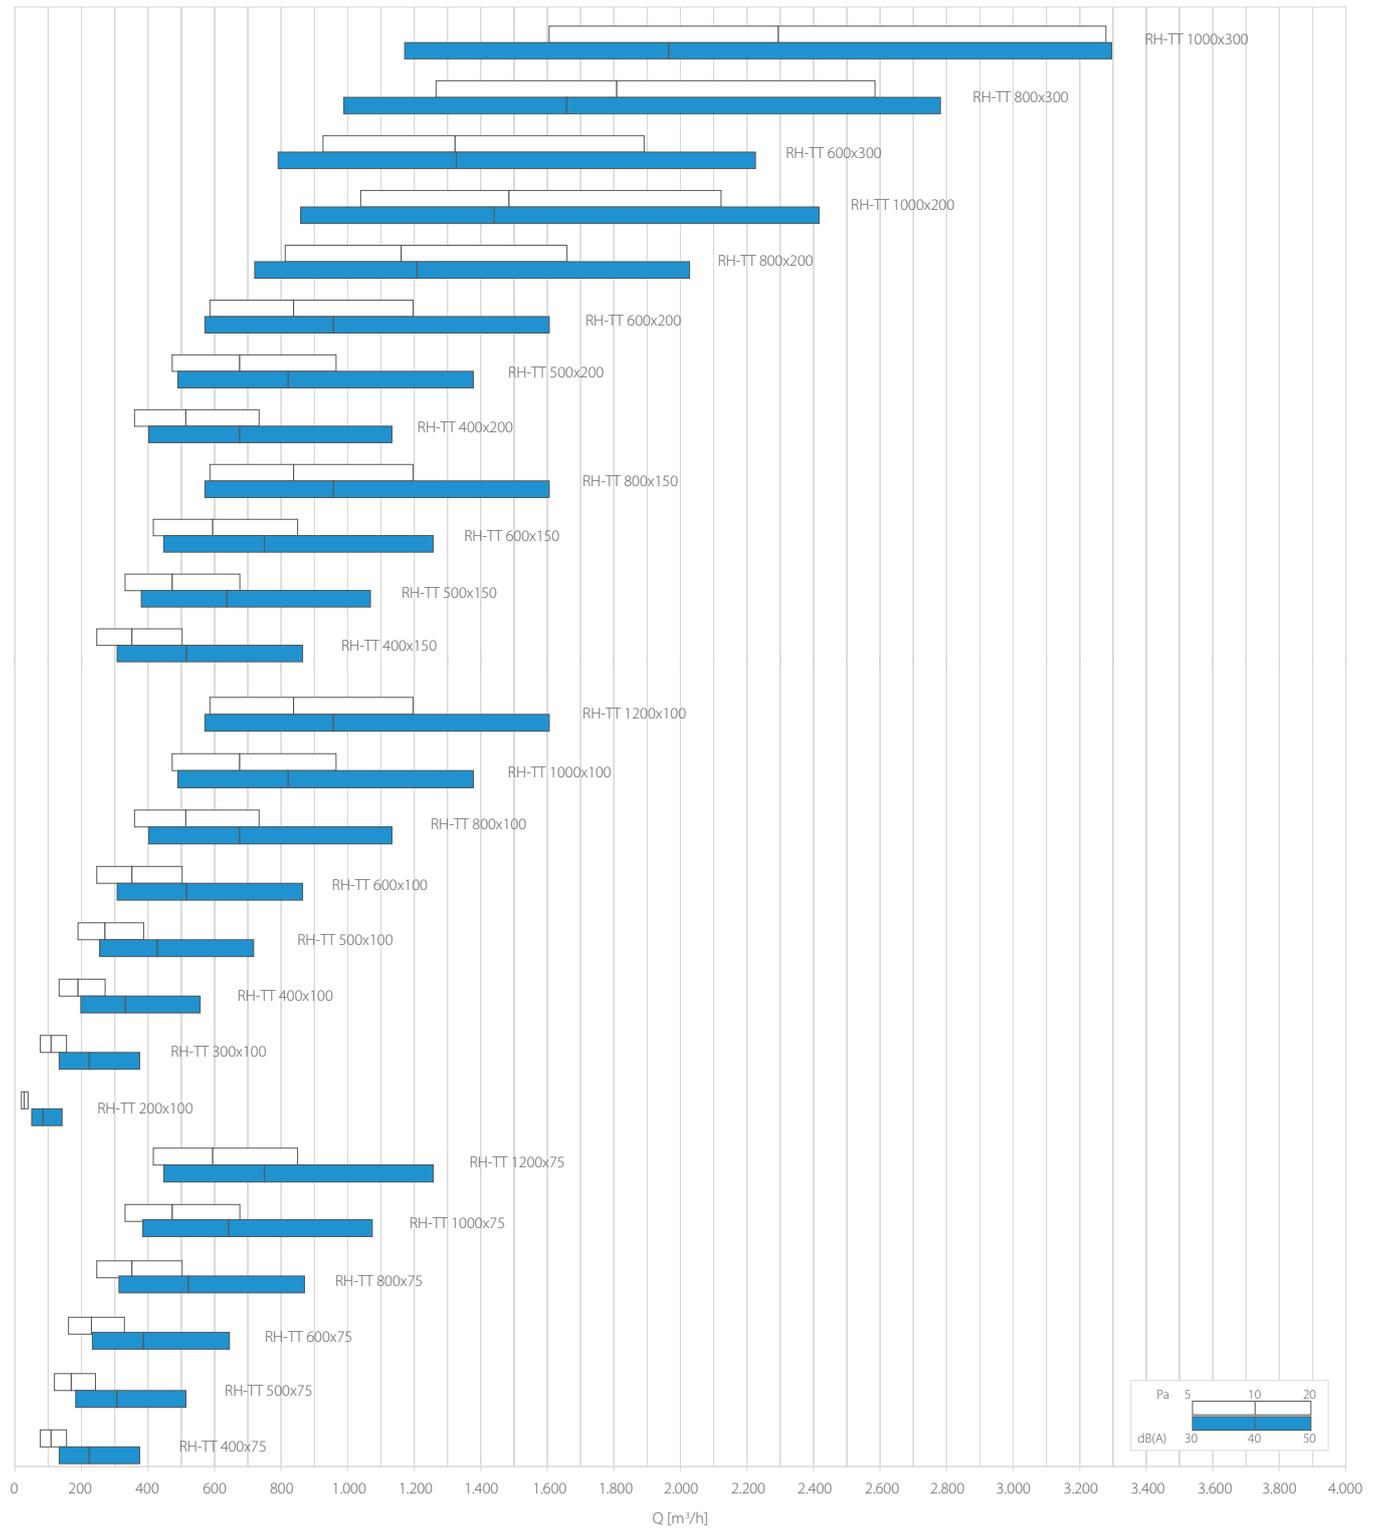

## Selection table

Model	A <sub>k</sub> [m <sup>2</sup> ]	Q [m <sup>3</sup> /h]		L <sub>WA</sub> [dB(A)]		X <sub>(0,25)</sub> [m]		Dp <sub>t</sub> [Pa]	
		min	max	min	max	min	max	min	max
RH-TT 400x75	0,0083	80	160	20	34	3,5	6,6	5	20
RH-TT 500x75	0,0129	120	240	22	35	4,2	8,0	5	20
RH-TT 600x75	0,0176	160	330	23	37	4,8	9,4	5	20
RH-TT 800x75	0,0268	250	500	26	39	6,1	11,7	5	20
RH-TT 1000x75	0,0361	330	680	27	41	6,9	13,8	5	20
RH-TT 1200x75	0,0453	420	850	29	42	7,9	15,5	5	20
RH-TT 200x100	0,0021	50	100	20	31	1,9	3,3	5	20
RH-TT 300x100	0,0083	80	160	20	34	3,5	6,6	5	20
RH-TT 400x100	0,0145	130	270	22	36	4,3	8,5	5	20
RH-TT 500x100	0,0206	190	390	24	38	5,3	10,3	5	20
RH-TT 600x100	0,0268	250	500	26	39	6,1	11,7	5	20
RH-TT 800x100	0,0392	360	730	28	41	7,3	14,2	5	20
RH-TT 1000x100	0,0515	470	970	29	43	8,3	16,6	5	20
RH-TT 1200x100	0,0638	590	1200	31	44	9,4	18,6	5	20
RH-TT 400x125	0,0206	190	390	24	38	5,3	10,3	5	20
RH-TT 500x125	0,0284	260	530	26	40	6,1	12,1	5	20
RH-TT 600x125	0,0361	330	680	27	41	6,9	13,8	5	20
RH-TT 800x125	0,0515	470	970	29	43	8,3	16,6	5	20
RH-TT 1000x125	0,0669	610	1250	31	45	9,5	19,0	5	20
RH-TT 1200x125	0,0823	760	1540	32	46	10,7	21,2	5	20
RH-TT 300x150	0,0176	160	330	23	37	4,8	9,4	5	20
RH-TT 400x150	0,0268	250	500	26	39	6,1	11,7	5	20
RH-TT 500x150	0,0361	330	680	27	41	6,9	13,8	5	20
RH-TT 600x150	0,0453	420	850	29	42	7,9	15,5	5	20
RH-TT 800x150	0,0638	590	1200	31	44	9,4	18,6	5	20
RH-TT 1000x150	0,0823	760	1540	32	46	10,7	21,2	5	20
RH-TT 1200x150	0,1008	930	1890	33	47	11,9	23,7	5	20
RH-TT 300x200	0,0268	250	500	26	39	6,1	11,7	5	20
RH-TT 400x200	0,0392	360	730	28	41	7,3	14,2	5	20
RH-TT 500x200	0,0515	470	970	29	43	8,3	16,6	5	20
RH-TT 600x200	0,0638	590	1200	31	44	9,4	18,6	5	20
RH-TT 800x200	0,0885	810	1660	32	46	11,0	22,1	5	20
RH-TT 1000x200	0,1132	1040	2120	34	47	12,6	25,2	5	20
RH-TT 1200x200	0,1379	1270	2590	35	49	14,0	28,0	5	20
RH-TT 400x300	0,0638	590	1200	31	44	9,4	18,6	5	20
RH-TT 500x300	0,0823	760	1540	32	46	10,7	21,2	5	20
RH-TT 600x300	0,1008	930	1890	33	47	11,9	23,7	5	20
RH-TT 800x300	0,1379	1270	2590	35	49	14,0	28,0	5	20
RH-TT 1000x300	0,1749	1610	3280	36	50	15,8	31,8	5	20
RH-TT 1200x300	0,2119	1950	3970	37	51	17,5	35,2	5	20
RH-TT 1000x400	0,2366	2170	4440	38	52	18,5	37,4	5	20
RH-TT 1200x400	0,2859	2630	5360	39	53	20,5	41,4	5	20